


台秤、各种压式测力装置
Platform scale, all kinds of compression testing devices

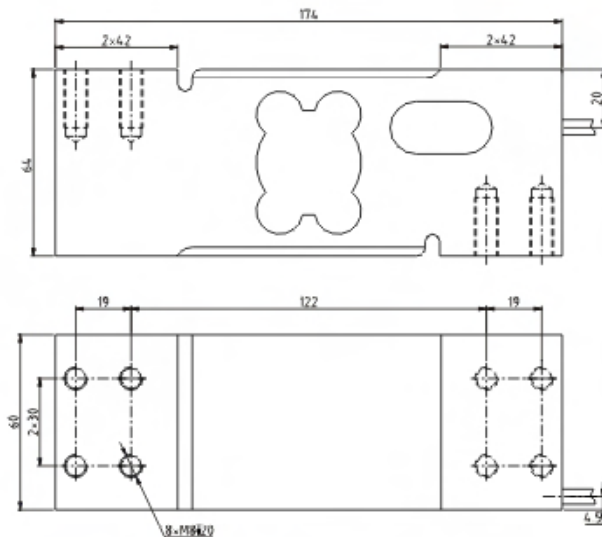

TECHNICAL PARAMETER

4Wires: Exc+(红, Red); Exc-(黑, Black); Sig+(绿, Green); Sig-(白, White)

额定载荷 Rated capacities(Emax)	50,60,75,100,150,200,250,300,350,500,600,635,750,800kg;1t	温度补偿范围 Temperature range, compensated	-10℃~+40℃
灵敏度 Sensitivity	2.0±0.2mV/V	工作温度范围 Temperature range, operating	-20℃~+50℃
精度等级 Accuracy class	OIML C3	安全过载 Maximum safe overload	150%Emax
蠕变(30分钟)Creep error (30min)	±166ppm	极限过载 Ultimate overload	300%Emax
零点平衡 Zero balance	±3%Emax	推荐激励电压 Excitation, recommended	10V DC
零点温度影响 TC ZERO	±17.5ppm/℃	最大激励电压 Excitation, maximum	15V DC
输出温度影响 TC SPAN	+20℃~+40℃, ±17.5ppm/℃	防封等级 Protection class	IP65
	-10℃~+20℃, ±11.67ppm/℃	材质 Construction	铝合金Aluminium
输入阻抗 Input resistance	404 ± 15Ω	电缆Cable	Length:1.8m Diameter: φ 5mm
输出阻抗 Output resistance	350 ± 3Ω	推荐安装力矩 Installation torque, recommended	25N · m
绝缘电阻 Insulation resistance	≥2000 MΩ (50V DC)		
推荐安装台面 Max. platform size	600 × 600mm		